



**60**  
kN



DOUBLE  
ROLLER/TAPPER  
BEARING

**-50**  
kN



Ø144  
M12(x10)  
mm



R  
3/8"  
BSP



R  
250  
bar



GO/GC  
3/8"  
BSP



GO  
250  
bar



GC  
300  
bar

**30**  
kN

**-25**  
kN

**1850**  
nm

**44**  
kg


**25**  
l/min

Hydraulic rotator FHR 6FF2S is ideal for professional use in forestry, agriculture, road and building construction, recycling industry, general cargo and material handling.



Rotator's upper mount is applied in FLANGE form factor. Rotator commonly is used for rigid mounting on the crane tip or in assembly with tilt equipment. Rotator is equipped with locating pins for ease mounting. The mounting holes are distributed on circle with diameter 144mm. top.flange.screw.count 10 12 screws.

Rotator lower mount is applied in SQUARE shape FLANGE form factor to mount direct on grapple / tool surface by fixing with screws






□140  
Ø17(x4)  
mm



GO/GC  
3/8"  
BSP



GO/GC  
3/8"  
BSP

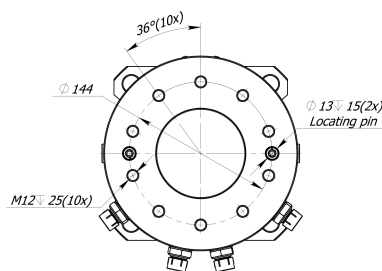

For additional information relating to price levels and technical data, please contact sales@formiko.lv

**Formiko Hydraulics Ltd**

Dzirceļa Str. 119 k-1,  
Rīga LV1055 LATVIA

+371 294 49 552  
+371 264 59 383  
sales@formiko.lv  
www.formiko.lv

On request by special conditions there are metric nipples available for rotator FHR 6FF2S



FORESTRY



GENERAL CARGO



AGRICULTURE



CONSTRUCTION



RECYCLING





Hydraulic rotator FHR 6FF2S is ideal for professional use in forestry, agriculture, road and building construction, recycling industry, general cargo and material handling.



Rotator's upper mount is applied in FLANGE form factor. Rotator commonly is used for rigid mounting on the crane tip or in assembly with tilt equipment. Rotator is equipped with locating pins for ease mounting. The mounting holes are distributed on circle with diameter 144mm. top.flange.screw.count 10 12 screws.



Rotator lower mount is applied in SQUARE shape FLANGE form factor to mount direct on grapple / tool surface by fixing with screws



Rotator FHR 6FF2S based on reliable vane type hydraulic motor which delivers torque up to 1850Nm at 25MPa.



Formiko Hydraulics rotator FHR 6FF2S is equipped with double bearings to withstand both tensional and pushing loads.



Rotator for shipping is packed in compact solid cardboard box with dimensions 400x250x250mm.



We providing TWO year warranty for this rotator.

For additional information relating to price levels and technical data, please contact [sales@formiko.lv](mailto:sales@formiko.lv)

**Formiko Hydraulics Ltd**

Dzirciema Str. 119 k-1,  
Riga LV1055 LATVIA

+371 294 49 552  
+371 264 59 383  
[sales@formiko.lv](mailto:sales@formiko.lv)  
[www.formiko.lv](http://www.formiko.lv)

On request by special conditions there are metric nipples  
available for rotator FHR 6FF2S

FORESTRY



GENERAL CARGO



AGRICULTURE



CONSTRUCTION



RECYCLING

